

# THE ALUMINUM Dump Bodies

Designed to Safely and Efficiently Haul

## OX BODIES



"As Strong As An Ox" ®



### Rugged Reliability

Provides maximum payload opportunity at 40 percent lighter than steel bodies.

- Releases materials quickly and easily with a 45-degree floor-to-side bevel included in this classic square body design.
- Minimizes material hang-up while releasing the load through one-piece floor construction.
- Offers body longevity with Aluminum I-Beam longsills and cross members protected by rubber inserts.

A  **TBEI** BRAND  
TRUCK BODIES & EQUIPMENT INTERNATIONAL, Inc.

[www.oxbodies.com](http://www.oxbodies.com)

## Standard Features

- 8'-19' Lengths, 5-30 yard capacity
- .190 Aluminum sides and front bulkhead
- .250 Floor and tailgate
- 1/4" Aluminum floor and tailgate
- 5-3/4" Aluminum I beam longsills
- 4" Aluminum I beam cross members
- Vertical side bracing
- Reflective tape on rub rail and tailgate
- Air operated tailgate
- 8" Board pockets
- Tarp tie-down strips with pin striping
- Ladders and steps at front of body
- 24" Cab shield
- Front doghouse hoist
- Custom wiring harness
- Cable to pump, air-shift pto controls
- Federal Standard 108, all LED lights
- One year warranty

## Basic Options

- Air operated hi-lift tailgate
- 2-Way (barn-door) tailgate
- Horizontal braced sides
- Electric or manual tarp
- Insulated sides & front
- 36" or 42" Cab shield
- 1/4" side panels
- 3/8" floor material
- Double deluxe light package
- 7" - 12" Asphalt apron
- Heavy duty push apron
- Body vibrator
- Steerable or rigid lift axles
- Wood or aluminum side boards
- Controls: all air, hot-shift pto or any combination
- Remote lubrication system



Direct mount, front lift telescopic hoist shown.


### HOIST SPECIFICATIONS

	84725UB	6382	63111	63120T	63130	63150T	63160T	73110	74135	74161
<b>NTEA PERFORMANCE CLASS</b>	60	70	80	90	100	100	100	110	100	110
<b>NUMBER OF STAGES</b>	1	3	3	3	3	3	3	3	4	4
<b>ACTIVE STAGE SIZES(IN.)</b>	6	5,4,3	5,4,3	5,4,3	5,4,3	5,4,3	5,4,3	6,5,4	6,5,4,3	6,5,4,3
<b>TOTAL STROKE(IN.)</b>	25	82	111	120	130	150	160	110	135	161
<b>CYLINDER RATED PRESSURE(PSI)</b>	2,000	2,000	2,000	2,000	2,000	2,000	2,000	2,000	2,000	2,000
<b>STD.PUMP GPM @ 1800 RPM</b>	29	29	48	48	48	48	48	48	48	48
<b>RECOMMENDED BODY LENGTH(FT.)*</b>	9-10	10-11	12-14	12-13	15-16	15-16	17	14	15-17	17-19
<b>APPROXIMATE WEIGHT(LBS.)</b>	228	250	260	270	295	290	290	335	370	405

### HOIST LOAD CAPACITY IN TONS\*

HOIST MODEL	NTEA CLASS	BODY LENGTH (FT.)													
		9	10	11	12	13	14	15	16	17	18	19			
84725UB UNDERBODY	60	26.4	23.1												
6382	70		32.3	28.5											
63111	80				33.3	29.7	26.2								
63120T	90				32.4	31.3									
63130	100								24.2	23.2					
63150T	100								31.2	29.0					
63160T	100										28.5				
73110	110						42.1								
74135	100								30.5	27.9	25.5				
74161	110										30.3	28.1	26.5		

\*Capacities based on water-level load, 12" overhang, 50 degree dump angle. Specifications subject to change. \*All hoists w/doghouse reservoir.

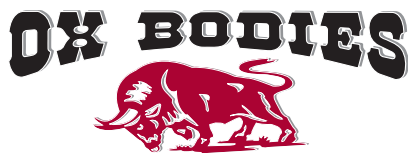

"As Strong As An Ox" ®

719 Columbus Street East • Fayette, AL 35555  
Phone 205-932-5720 • 800-844-2519

Sold by: